

(19) World Intellectual Property
Organization
International Bureau



08 JUN 2005



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088581 A1

(51) International Patent Classification⁷: **G06K 19/073**

(21) International Application Number:
PCT/JP2004/004341

(22) International Filing Date: 26 March 2004 (26.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-094813 31 March 2003 (31.03.2003) JP

(71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA [JP/JP]**; 3-30-2, Shimomaruko, Ohta-ku, Tokyo, 1468501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HIRAI, Tadahiko [JP/JP]**; c/o CANON KABUSHIKI KAISHA 3-30-2, Shimomaruko, Ohta-ku, Tokyo, 1468501 (JP).

(74) Agents: **OKABE, Masao et al.**; No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo, 1000005 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **UNAUTHORIZED ACCESS PREVENTION METHOD**

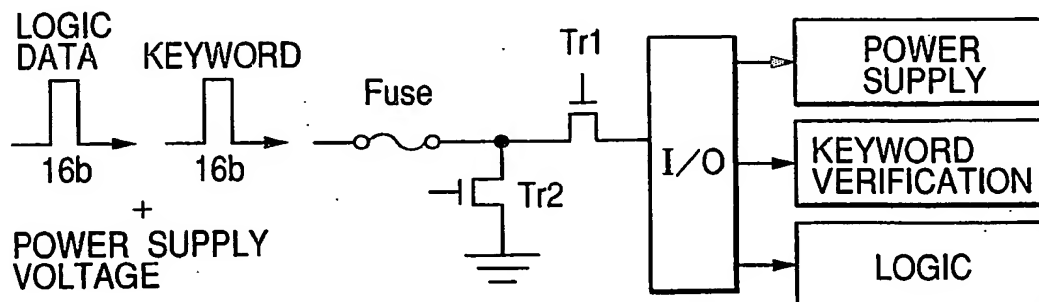

(57) **Abstract:** An unauthorized access prevention method is provided for an integrated circuit including one or plural resistor elements capable of selecting between a high impedance state and a low impedance state irreversibly in an interface portion within the integrated circuit or a peripheral circuit portion. When a signal inconsistent with verification information and standard that are preset in the integrated circuit is received at least once, the impedance state of the resistor element is changed from an initial state to stop a part or all of accesses to the integrated circuit irreversibly. The unauthorized access prevention method is thus implemented by a simple structure manufactured with ease and at low cost.

BEST AVAILABLE COPY